

July 1969


Brief 69-10220

NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Linear Voltage-to-Frequency Converter

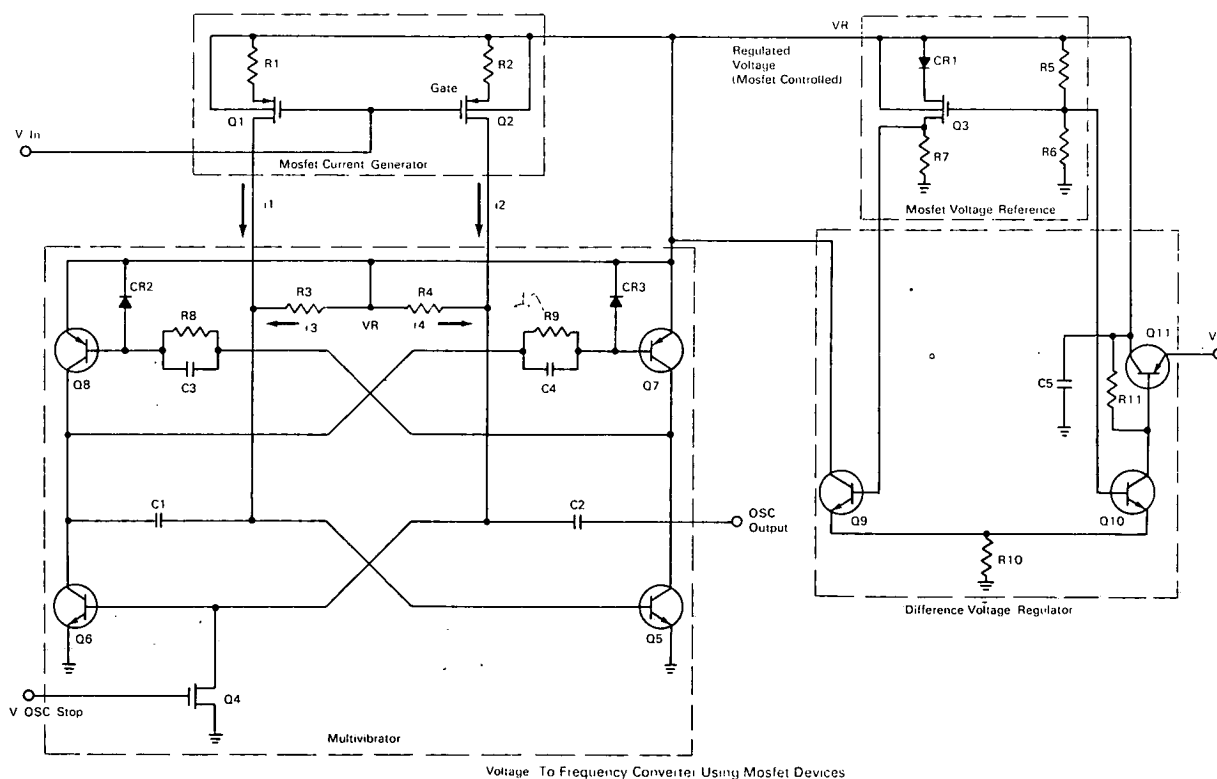

Voltage To Frequency Converter Using Mosfet Devices

A voltage-to-frequency converter has been designed with properties of ultra-high input impedance and linear response. Potential circuit applications are quite broad and would generally include use in analog to digital data conversion systems.

The problem:

Voltage sensitive magnetic-core oscillators have previously been used to provide voltage-to-frequency conversion for 8 bit 20 ms samples. But, inherent non-linearities of response and required temperature

compensation, in addition to a limited frequency range have proved to be limitations with no simple solutions for their circumvention when 8 bit 5 ms sampling is now required.

The solution:

A high input impedance voltage-to-current converter using MOSFET devices, combined with a complementary multivibrator, has been designed with ultra-linear voltage-to-frequency characteristics from 6 kHz

(continued overleaf)

to 46 kHz. Temperature compensation has been provided from -35°C to $+85^{\circ}\text{C}$ by counterbalancing the V/F convertor changes with corrective changes in the regulator supply voltage.

How it's done:

The MOSFET Current Generator produces currents $i_1 + i_2$ with $i_3 + i_4$ which determine the frequency produced by the multivibrator. The regulated voltage V_r varies in proportion to the gate threshold voltage of Q_1 and Q_2 ; changes in the gate-source voltage must be compensated by equivalent changes in the regulated supply. The MOSFET Voltage Reference accomplishes this by using a conventional difference amplifier, voltage regulator composed of Q_3 , Q_9 , Q_{10} and Q_{11} . The regulator is able to control the voltage supplied to the analog oscillator and varies as a function of temperature in the same manner as the MOSFETS within the oscillator.

Note:

Documentation is available from:

Clearinghouse for Federal Scientific
and Technical Information

Springfield, Virginia 22151

Price \$3.00

Reference: TSP69-10220

Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to NASA, Code GP, Washington, D.C. 20546.

Source: Donald C. Lokerson
Goddard Space Flight Center
(GSC-10546)